R89

REGIONAL | STEER / ALL-POSITION



M+S | High-Scrub Compound | (7-Year / 3-Retread) Enhanced Casing Warranty* | Smartway® Verified

Premium 5-rib regional steer all-position tire featuring high-scrub compound, delivering long tread life, confident handling, even wear, and high retreadability.

COMPARABLE TO:

Bridgestone	R273 Ecopia
Michelin	XZE2
Continental	HSR2 / HSR3 / Hybrid HS3
Goodyear	Endurance RSA / G670 RV MRT

TREAD A



TREAD B




	TIRE SIZE	PRODUCT NUMBER	LOAD RANGE PLY RATING	LOADED RADIUS	OVERALL DIAMETER	OVERALL WIDTH	APPROVED RIMS	MINIMUM DUAL SPACING	REVS PER MILE	TREAD DEPTH 32NDS	MAX SPEED	MAX TIRE LOAD		M+S	SMARTWAY® VERIFIED	
												SINGLE	DUAL			
				in. (mm)	in. (mm)	in. (mm)	in.	in. (mm)	rpm (rpk)	(mm)	mph (kph)	lbs. psi (kg kPa)	lbs. psi (kg kPa)			
B	275/70R22.5	3886307	J/18	17.5 (444)	37.6 (955)	11.1 (283)	8.25 7.50	11.9 (303)	552 (343)	17/32 (13.5)	81 (130)	6945/130 (3150/900)	6395/130 (2900/900)	✓	✓	✓
	295/75R22.5	3462107	H/16	18.7 (476)	40.1 (1018)	11.9 (303)	9 8.25	13.2 (335)	518 (322)	21/32 (16.5)	75 (120)	7160/123 (3250/850)	6610/123 (3000/850)		✓	
	315/80R22.5	6009607	L/20	19.8 (502)	42.5 (1080)	12.4 (314)	9 9.75	13.8 (351)	488 (304)	20/32 (16.0)	81 (130)	9370/130 (4250/900)	8820/130 (4000/900)	✓		
	285/75R24.5	3830707	H/16	19.5	41.7	11.1	8.25 7.50. 8.25	12.5 (318)	499 (310)	21/32 (17.0)	75 (120)	6780/120 (3075/830)	6175/120 (2800/830)			
	11R22.5	3271707	H/16	19.2	41.5	11.5	8.25 7.50	12.5 (318)	504 (313)	21/32 (16.5)	75 (120)	6610/120 (3000/830)	6005/120 (2750/830)		✓	
B	11R24.5	3462407	H/16	20.2	43.4	11.2	8.25 7.50	12.5 (318)	482 (299)	20/32 (15.5)	75 (120)	7160/120 (3250/830)	6610/120 (3000/830)			

NOTES


* Rim underlined is measuring rim.
* Exceeding the lawful speed limit is neither recommended nor endorsed.
* Important note: 275/70R22.5 LR J can only be used on either 7.50" or 8.25" wheel. It cannot be used on 9" wheel.

FEATURES

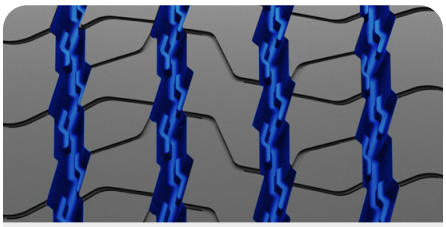

STRONG TRACTION PERFORMANCE

Four longitudinal grooves channel water and debris away from the contact patch to maintain steady rib-to-road engagement **for stronger wet traction and braking** response. Zigzag groove paths redirect shear forces to minimize lateral slip under torque, while terrace-type stone ejectors help **prevent stone drilling** into the casing, supporting greater **casing life** for multiple future retreads.

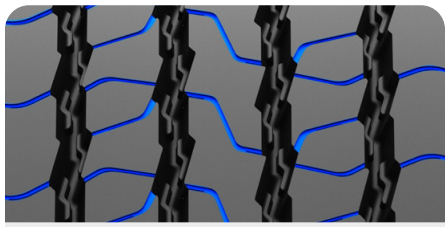

HANDLING STABILITY

Cross-rib sipes control block flex under load, reducing energy-loss deformation that helps maintain **fuel efficiency** during **extended regional haul service**. The stabilized rib sections improve handling precision during tight turns and warehouse maneuvering, while the high-scrub compound **resists abrasion to limit irregular wear** and deliver **long tread life** and high miles to removal.



IRREGULAR WEAR RESISTANCE

Solid closed shoulder rib provides excellent stability and **resistance to irregular wear,** while fine shoulder sipes aid heat dissipation and traction. The design **ensures even wear** and consistent performance across regional routes.