R02 PRO TRAILER 17.5

PROMETEON

REGIONAL | TRAILER





M+S | FRT | High-Scrub Compound | SERIE 02 | 2nd Generation Product Series (Backed by Prometeon)

17.5" regional trailer radial optimized for low-bed, high-cube, and traveling-axle trailer operations, featuring reinforced shoulder design and high load-carrying capability for consistent performance.

COMPARABLE TO:

Bridgestone	R238
Michelin	X Multi T2 / XTE2
Continental	HTL2 ECO PLUS / HTR2
Goodyear	G114 LHT / G159A

TIRE SIZE	PRODUCT NUMBER	LOAD RANGE PLY RATING	LOADED RADIUS	OVERALL DIAMETER	OVERALL WIDTH	APPROVED RIMS	MINIMUM DUAL SPACING	REVS PER MILE	TREAD DEPTH 32NDS	MAX SPEED	MAX TIRE LOAD		M+S	SMARTWAY® VERIFIED	
											SINGLE	DUAL			
			in. (mm)	in. (mm)	in. (mm)	in.	in. (mm)	rpm (rpk)	(mm)	mph (kph)	lbs. psi (kg kPa)	lbs. psi (kg kPa)			
205/65R17.5	6047700	J/18	12.9 (329)	28.0 (711)	8.1 (205)	6.00 6.75	9.1 (231)	747 (464)	14/32 (11.0)	62 (100)	4410/130 (2000/900)	4190/130 (1900/900)	✓		✓
215/75R17.5	6047800 6020400[1]	J/18	14.0 (354)	30.5 (775)	8.5 (215)	6.00 6.75	9.4 (239)	681 (423)	15/32 (12.0)	68 (110)	4940/130 (2240/900)	4675/130 (2120/900)	✓		✓
235/75R17.5	6109900	J/18	14.3 (363)	31.3 (796)	9.5 (241)	6.75 7.50	10.3 (262)	663 (412)	15/32 (12.0)	75 (120)	6005/130 (2725/900)	5675/130 (2575/900)	✓		✓
245/70R17.5	6047600	J/18	14.3 (363)	31.3 (796)	10.0 (253)	7.50 6.75	11.0 (279)	663 (412)	15/32 (12.0)	75 (120)	6005/130 (2725/900)	5675/130 (2575/900)	✓		✓

NOTES

* Rim underlined is measuring rim.
* Exceeding the lawful speed limit is neither recommended nor endorsed.
* This tire is marked FRT (Free Rolling Tire) and is designed exclusively for use on trailer axles. It must not be fitted to steer or drive positions.


[1] Denotes legacy tire model featuring PIRELLI sidewall branding.

FEATURES



OPTIMAL TREAD LIFE

Three linear grooves combined with tread micro-sipes optimize rib contact pressure for **consistent road contact, delivering stable tracking and reliable traction** in wet and all-season conditions.

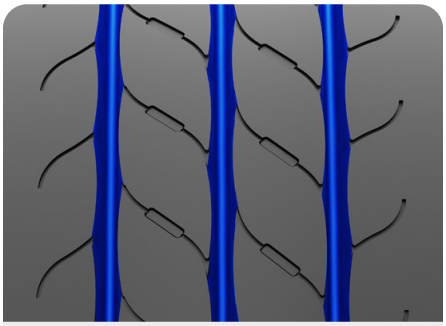

INNOVATIVE HEAT MANAGEMENT

Shallow tread depth contributes to **low rolling resistance** and more uniform wear patterns, while also **improving heat dissipation** to **keep the tire running cooler** under load.



SHOULDER SCRUB ENDURANCE

Wide, robust shoulder delivers **strong tear resistance to chipping and chunking** and helps the tire **withstand side scrubbing** during trailer turning in high-scrub conditions.