
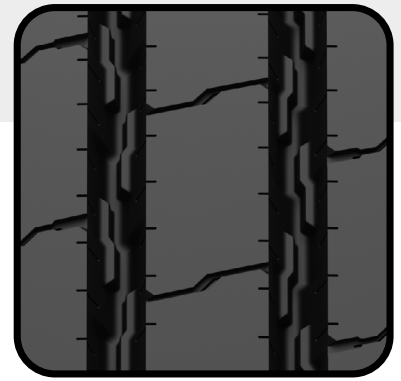


ANTEO PRO - M

REGIONAL STEER / ALL-POSITION

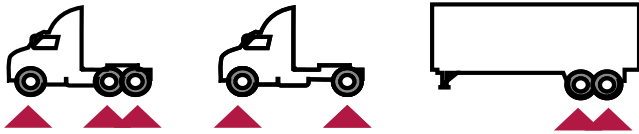

M+S

ANTEO



SIZE	PRODUCT NUMBER	LOAD RANGE PLY RATING	LOADED RADIUS in (mm)	OVERALL DIAMETER in (mm)	OVERALL WIDTH in (mm)	APPROVED RIMS in.	MINIMUM DUAL SPACING in. (mm)	REVS PER MILE rpm (rpkm)	TREAD DEPTH 32nds (mm)	MAX SPEED mph (kph)	SINGLE lbs Psi (kg kPa)	DUAL lbs Psi (kg kPa)
295/75R22.5	6079707	H/16	18.7	40.1	11.4	9.00	13.2	518	19/32	75	7160/123	6610/123
			(476)	(1018)	(290)	8.25	(335)	(322)	(15)	(120)	(3250/850)	(3000/850)
11R22.5	6079907	H/16	19.2	41.5	11.0	8.25	12.5	503	19/32	75	6610/120	6005/120
			(489)	(1055)	(280)	7.50	(318)	(313)	(15)	(120)	(3000/825)	(2725/825)
11R24.5	6080107	H/16	20.2	43.5	11.2	8.25	12.5	481	19/32	75	7160/120	6610/120
			(514)	(1105)	(284)	7.50	(318)	(299)	(15)	(120)	(3250/825)	(3000/825)

Note: Rim underlined is measuring rim / Exceeding the lawful speed limit is neither recommended nor endorsed.

- Tread pattern design promotes safety through wet and snow grip performance
- The optimized tread footprint enhances steering precision.
- The groove geometry design prevents stone trapping for maximum tearing resistance.
- Groove sipes designed for optimized tread wear

TRUCK TIRE COMPARISON CHART

APPLICATION	WHEEL POSITION	DOUBLE COIN	SAILUN	ROADMASTER TIRES
REGIONAL	Steer - All Position	RR680	S665 EFT	RM234

ANTEO