


ANTEO MOVER - M

ON-OFF ROAD
STEER / ALL-POSITION

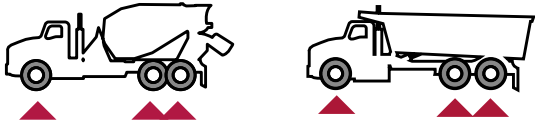

M+S

ANTEO



SIZE	PRODUCT NUMBER	LOAD RANGE PLY RATING	LOADED RADIUS in (mm)	OVERALL DIAMETER in (mm)	OVERALL WIDTH in (mm)	APPROVED RIMS in.	MINIMUM DUAL SPACING in. (mm)	REVS PER MILE rpm (rpk)	TREAD DEPTH 32nds (mm)	MAX SPEED mph (kph)	SINGLE lbs Psi (kg kPa)	DUAL lbs Psi (kg kPa)
11R22.5	6080307	H/16	19.3	41.6	11.0	<u>8.25</u>	12.5	502	23/32	68	6610/120	6005/120
			(490)	(1058)	(281)	7.50	(318)	(312)	(18)	(110)	(3000/825)	(2725/825)
11R24.5	6080507	H/16	20.3	43.6	11.2	<u>8.25</u>	12.5	479	23/32	68	7160/120	6610/120
			(515)	(1108)	(286)	7.50	(318)	(298)	(18)	(110)	(3250/825)	(3000/825)

Note: Rim underlined is measuring rim / Exceeding the lawful speed limit is neither recommended nor endorsed.

- Innovative groove design promotes the tread pattern «self-cleaning» and excellent tear and cut resistance.
- Functional sipes provide grip and wet braking distance.
- Solid shoulders promote even tread wear.
- Lateral cavities enhance optimum ventilation in the buttress area and limit heat generation for superior tire life.

TRUCK TIRE COMPARISON CHART

APPLICATION	WHEEL POSITION	DOUBLE COIN	SAILUN	ROADMASTER TIRES
MIXED SERVICE	Steer - All Position	RR706	S819	RM230 HH

ANTEO