FG:01

MIXED SERVICE | STEER / ALL-POSITION



M+S | >10,000 Rated Load Capacity (Single) | Chip-and-Cut Compound

5-rib steer all-position tire engineered for heavy-duty on/off-road service, rated up to 10,000 lb single load capacity, delivering stability, even wear, high mileage, and confident traction.


COMPARABLE TO:

Bridgestone	M843
Michelin	X Works Z
Continental	HSC3
Goodyear	G751 MSA

TIRE SIZE	PRODUCT NUMBER	LOAD RANGE PLY RATING	LOADED RADIUS	OVERALL DIAMETER	OVERALL WIDTH	APPROVED RIMS	MINIMUM DUAL SPACING	REVS PER MILE	TREAD DEPTH 32NDS	MAX SPEED	MAX TIRE LOAD		M+S	SMARTWAY® VERIFIED	
											SINGLE	DUAL			
			in. (mm)	in. (mm)	in. (mm)	in.	in. (mm)	rpm (rpk)	(mm)	mph (kph)	lbs. psi (kg kPa)	lbs. psi (kg kPa)			
315/80R22.5	3886207	L/20	19.8 (502)	42.5 (1080)	12.4 (314)	9.00 **9.75**	13.8 (351)	488 (304)	23/32 (18.0)	68 (110)	10200/130 (4625/900)	9095/130 (4125/900)	✓		✓


NOTES
* Rim underlined is measuring rim.
* Exceeding the lawful speed limit is neither recommended nor endorsed.

FEATURES

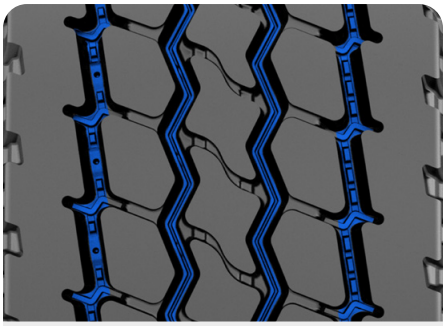

CASING DURABILITY

Wide, zig-zag grooves channel water for strong wet traction and shorter braking distances, while integrated stone ejectors clear debris to **prevent drilling**. This **protects the casing for future retreads** and helps deliver longer, more efficient mileage across demanding operating conditions.

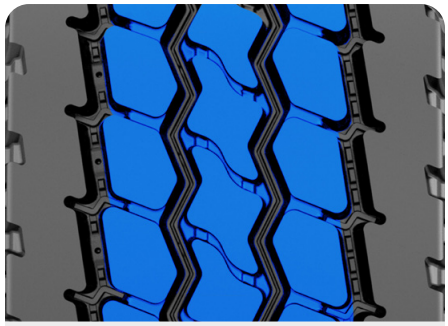

ENHANCED TREAD LIFE

Interlocking center tread blocks reinforced with tie-bar support **limit flex and reduce contact-area scrubbing** that normally causes irregular wear. The wide tread profile forms a broad, stable contact patch that **strengthens traction, braking performance**, and high-load stability in mixed on/off-road use.



EVEN LOAD DISTRIBUTION

The reinforced shoulder spreads load evenly to **maintain a stable contact patch, improving mileage efficiency**, cornering stability, and resistance to edge wear. Extra rubber mass **resists chipping** and helps reduce rolling drag, contributing to better fuel economy under heavy-duty operating conditions.